



POLYURETHANE
MACHINERY CORPORATION

PMC'S NEW DUAL GUN PROPORTIONER

PREMIER MACH 2


SPRAY **2X FASTER** WITH
TWO GUNS ON ONE MACHINE

KEY FEATURES:

- Remote access via any internet enabled device.
- One transformer supplies power to two 160-260' sets of hose.
- 2,000 psi size 120 pumps outputs 40 lbs/min. Supports up to two size 02 or equivalent chambers.
- Single pump-line and heater set pulls less amperage than running two machines (77 amps total).
- Data recording and reporting to prove on-ratio application.



WWW.POLYMAC-USA.COM

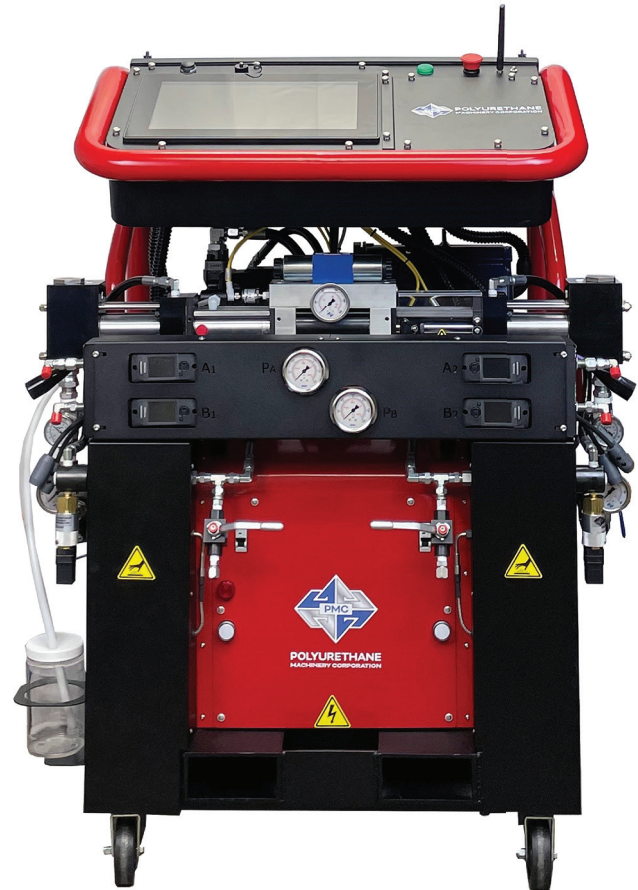

BUY THE BEST THE FIRST TIME.

WORLDWIDE HEADQUARTERS
One Komo Drive Lakewood, NJ 08701 USA
(732) 415-4400 | E: marketing@polymacusa.com

PREMIER MACH 2



POLYURETHANE
MACHINERY CORPORATION

Dual Gun Proportioner works with guns from any manufacturer. The Premier Mach 2 supports any two 02 or equivalent size chamber guns or 40lbs/min output of foam.

Remote access the dual proportioner from any web enabled device without the need to download an app.

Save space, money and energy by running one Premier Mach 2 instead of two standard proportioners.

Chemical Management Display ensures that ratio, temperature and pressures are accurate on both sides.

Reporting Software captures data in real time and displays a graph for easy-to-see results. Reports can be emailed directly from the machine.



TECHNICAL DATA

MODEL

PREMIER MACH 2

Output.....	40 lbs/min Supports up to two 02 or equivalent size chambers
Max. Working Pressure.....	2,000 psi (138 bars)
Max. Hose Length.....	Output 1 Min: 160' - Max 260' (48.77m - 79.25 m) Output 2 Min: 160' - Max 260' (48.77 m - 79.25 m)
Heater Wattage	18,000 watts (dual htr)
Hose Heating Power	Dual 70v Output Multitap
Max. Fluid Temp	190 °F (87.7 °C)
Weight (Empty Hydraulic Tank) ..	690 lbs (313 kg)
Weight (Full Hydraulic Tank).....	864 lbs (392 kg)
Electrical @ 18KW Heaters	77 amps @ 3 x 230V
Dimensions (W x D x H)	40in x 30in x 55in (102cm x 76cm x 140cm)

**Output measured with mineral oil*

PMC LEGEND FOR MACHINE DESCRIPTIONS

PH-2.....Machine Series

3HP.....Horsepower (3hp, 5hp, 7.5 hp)

230V...Voltage (230v, 380v or 460v)

1PH.....Phase (Single or Three)

RV.....Recirculation Values

90T.....Transformer Size (30V, 70V, 90V, 120V)

10KW.....Heater Wattage

1M.....Inlet Monitoring

PCB.....Pressure Balance Control



ORDERING INFORMATION

Part #...Description

PREMIER MACH 2

203767....M2,5HP,220V,3PH,RV,120T,18KW

DURABLE. RELIABLE. SMARTER.
OUR PRODUCTS OUTPERFORM & OUTLAST OUR COMPETITORS

BUY THE BEST
THE FIRST TIME
FIND A →
DISTRIBUTOR



POLYMAC-USA.COM