

# WINCO<sup>®</sup> GENERATORS


## WL22000VE/C

19,000 RUNNING WATTS


Rugged Steel Design.



B & S Commercial Vanguard Engine.

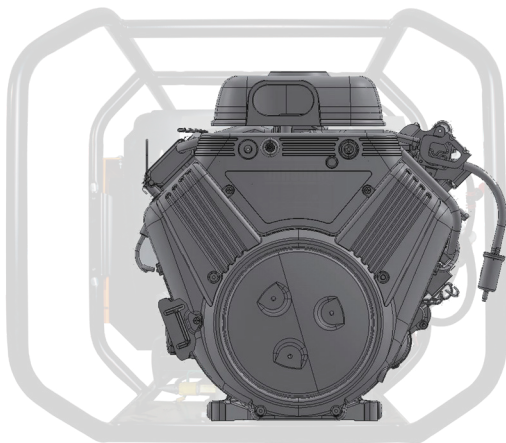

Brushless Industrial Genend.

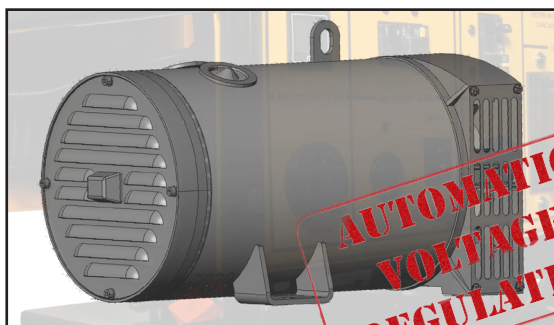

**AUTOMATIC  
VOLTAGE  
REGULATION**

 An American Company.

We produce our products in our 200,000ft<sup>2</sup> facility located in Le Center, Minnesota, equipped with modern engineering, fabrication and assembly capabilities.



### YOURGEN



LED Display

Hours, RPMs, voltage, and frequency readings automatically cycle on the display.


Load Bars

Easily verify the load balance on each leg of the generator end.

Warnings

The LED will flash if any parameter gets outside of normal range. A warning will also be displayed when it is time for an oil change.

Receptacle Panel

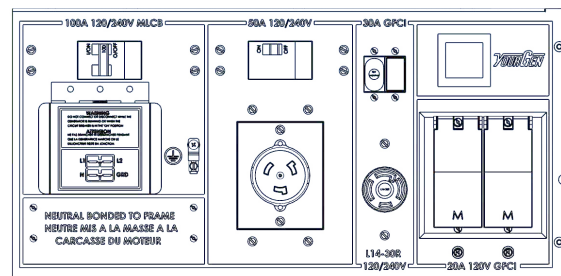

# SPECIFICATIONS

## ENGINE

|                                     |                     |
|-------------------------------------|---------------------|
| ENGINE BRAND                        | BRIGGS & STRATTON   |
| ENGINE MODEL                        | VANGUARD            |
| ENGINE STARTER                      | ELECTRIC            |
| ENGINE SPEED                        | 3600 RPM            |
| ENGINE CYLINDERS                    | V-TWIN              |
| DISPLACEMENT/TYPE                   | 993 CC / OHV        |
| FREQUENCY REGULATION <sup>(1)</sup> | +/-1.5%             |
| LOW OIL PROTECTION                  | STANDARD            |
| RECOMMENDED OIL <sup>(2)</sup>      | 10W-30              |
| OIL CAPACITY                        | 2.3 QT              |
| FUEL TANK                           | 15 GAL              |
| FUEL GAUGE                          | YES                 |
| FULL LOAD RUN TIME <sup>(3)</sup>   | 4.5 HOURS           |
| FUEL CONSUMPTION                    | GAL/HR              |
| 100%                                | 3.28                |
| 75%                                 | 2.57                |
| 50%                                 | 1.88                |
| 25%                                 | 1.43                |
| 0%                                  | 0.95                |
| BATTERY SIZE <sup>(4)</sup>         | BCI GROUP 26 500CCA |

NOTES: (1) Steady state frequency regulation. (2) The recommended oil is for normal applications. See operator's manual for the recommended oil for your needs. (3) Run time is estimated. (4) Battery not included.

## OPTIONAL ACCESSORIES

|                      |                      |
|----------------------|----------------------|
| FOUR-WHEEL DOLLY KIT | WITH FLAT-FREE TIRES |
| COVER                | 45" x 32" x 30"      |
| 50A PLUG             | CS6365C              |
| 30A PLUG             | NEMA L14-30P         |
| BATTERY              | BCI GROUP 26 500 CCA |
| MAINTENANCE KIT      | 16200-011            |

## ELECTRICAL

|                          |                                              |
|--------------------------|----------------------------------------------|
| STARTING WATTS           | 22,000                                       |
| RUNNING WATTS            | 19,000                                       |
| RUNNING AMPS @ 120 VAC   | 158.3                                        |
| RUNNING AMPS @ 240 VAC   | 79.2                                         |
| VOLTAGE REGULATION       | AVR +/- 1.5%                                 |
| MAIN CIRCUIT BREAKER     | 100 AMP, 120/240V                            |
| BONDED NEUTRAL           | YES                                          |
| 120 VOLT RECEPTACLES     | (2) NEMA 5-20 20A DUPLEX (GFCI)              |
| 120/240 VOLT RECEPTACLES | (1) CS6365 50A<br>(1) NEMA L14-30 30A (GFCI) |
| 120/240 VOLT ANDERSON    | 120A                                         |
| YOURGEN METER            | STANDARD                                     |


## WL22000VE

|                              |                         |
|------------------------------|-------------------------|
| MOTOR STARTING (CODE G)      | 6 HP                    |
| DBA @ 7 METERS               | 79                      |
| TOTAL HARMONIC DISTORTION    | < 6%                    |
| LIFTING EYE <sup>(1)</sup>   | STANDARD                |
| 4-WHEEL DOLLY KIT            | OPTIONAL                |
| INSULATION                   | CLASS H                 |
| PROTECTIVE ROLL FRAME        | 1.25" DIA. 14 GA. STEEL |
| ASSEMBLED IN                 | USA                     |
| EPA APPROVED                 | YES                     |
| CARB APPROVED                | NO                      |
| TÜV CSA CERTIFICATION        | NO                      |
| UNIT WARRANTY <sup>(2)</sup> | 3 YEARS COMMERCIAL      |

NOTES: (1) Shipping eye shipped loose. (2) For more generator warranty, see operator's manual.

## SHIPPING

|                                 |                 |
|---------------------------------|-----------------|
| SHIPPING DIMENSIONS (L x W x H) | 44" x 31" x 37" |
| SHIP WEIGHT                     | 504 LBS         |
| FREIGHT CLASS                   | 70              |

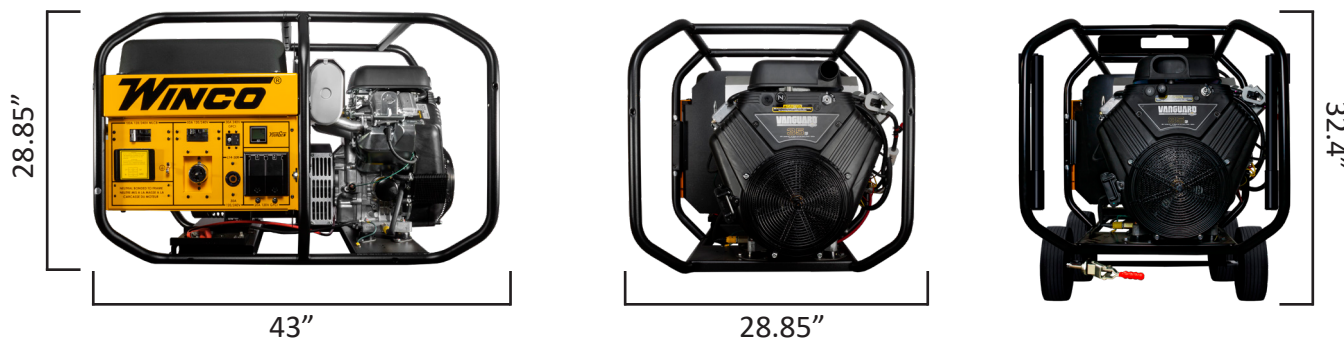

Specifications are subject to change without notice.

